

TAYLOR 35 USER MANUAL AND IMPORTANT INFO

Congratulations, and thank you for purchasing your new TAYLOR engine.

This is a high performance, two stroke engine which produces multiple times the power of a standard largescale, RC car/buggy engine. Please be prepared for the insane increase from your RC!! Drive with care while you are getting used to this.

We strongly recommend fitting a remote kill switch to your engine, as should be the practice with all largescale cars. All Normal 1/5 scale kill switches work properly with this engine, it is also supplied with a standard kill button.

Important Safety Note:

Because of the performance potential of this engine in a vehicle, such as the HPI Baja, it is necessary to operate the vehicle in a suitable, controlled environment. It should not be operated in a public space where people are engaged in other activities, such as a public park. Do not operate in an area where there are children playing, near pets or other animals. Do not operate on a public highway.

Loss of control of such a vehicle could result in serious injury to another person, family pet or other animal.

Be aware that the engine silencing is minimal so do not run the engine in an area where this could cause a nuisance. You and those around you should always use ear protection during operation.

Please note: All of the manufacturers safety instructions for the operation of the vehicle in which the engine is fitted, must be followed.

Fuel Safety Guidelines

Fuel is highly flammable. Never operate the vehicle near open flames. Do not smoke while handling fuel. Always operate the vehicle in a well ventilated area. Model car engines produce carbon monoxide fumes.

Hot Engine surfaces

DO NOT at any time when running or within 30minutes of running touch any metal surfaces on the engine. Only the pull start handle, carb and stop buttons can be considered safe to touch when hot.



Engine Fitment

Your new TAYLOR 35 Billet RC Engine is pretty much universal to all gas 5th scale platforms (see web sale listing for fitment list).

The 35 will work with all 5th scale exhaust systems safely and make good power, so it acts as a direct swap for any stock Zenoah/CY/KM/Rovan/30N/Fuelie etc engine. For the Ultimate performance look out for a TAYLOR brand exhaust system to suit your vehicle, these of course were designed hand in hand with our test engines.

The supplied Billet clutch housing has a thin shim temporary attached to the face for shipping. This shim allows you to fit it to cars such as the HPI Baja or Kraken Vekta etc where a full depth clutch housing is needed. Or simply remove the shim and keep safe if fitting to cars like the Losi 5T/5B etc where a short clutch housing is needed.

Engine Starting/Break-in Procedure

First Time Engine Starting.

When starting for the first time following engine installation it will be necessary to draw the fuel from the fuel tank up to the carburettor. Prime the carb several times until you can see the fuel passing into the carb from the line so you know the carb is full. (via primer bulb on the top of the carb)


Next turn on the choke (if you have one) and pull the engine at high speed until she fires once. After this turn off the choke and try to start the engine, sometimes a little throttle will help a lot to get her going.

If you are using a carb which does not feature a choke, that's fine, simply repeat the above method but instead of using the choke lever, use your hand to block the air intake for first pull to act as an effective choke method. You will not need to do this for many times as the choking effect will be large.

Engine Break-In.

After starting the engine make sure it is fully up to operating temperature before driving the vehicle. For initial break in during the first 5mins, allow the engine to idle with intermittent blips of the throttle. For the 2-3 tanks of fuel operate the vehicle in a mechanically sympathetic manner with a nice rich safe tune so that there is lots of fuel/oil mix going through the motor to lubricate it while tight and new. As long as you run your new engine with a rich tune, your going to struggle to hurt it. It's a very reliable lump.

From this point on you can dial in the tune and let her true potential be unleashed as the motor loosens up!

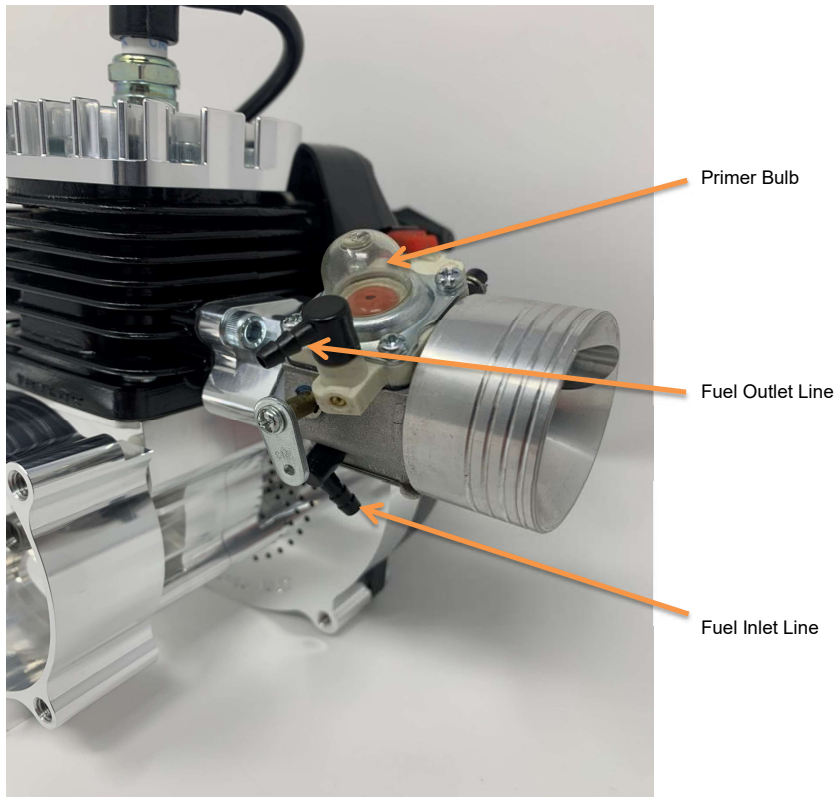

Walbro Carburettor Info and Settings


When fitting your chosen carb to the 35, make sure to fit the heat isolator with gaskets (supplied) either side of it between the carb and the manifold (see photo for correct fitment). Take your time to use the correct length bolts for each different intake/stack on the market so that its secure.

Make sure you complete the run in of the engine on a rich setting before considering leaning it out for optimal performance. Please remember your climate and altitude could result in the requirement for different settings, so as with any two stroke, start with caution and care.

FACTORY SETTINGS (Baseline)

HIGH Speed mixture adjustment screw
RT990 = Base setting is **1 5/8** turns out
1107 MOD= Base setting is **2** turns out
WT1257 = Base setting **2 1/8** turns out

LOW Speed mixture adjustment screw
RT990 = Base setting is **1 1/8** turns out
1107 MOD= Base setting is **1 3/8** turns out
WT1257 = Base setting **1 3/8 to 1 1/2** turns out
(weather depend)

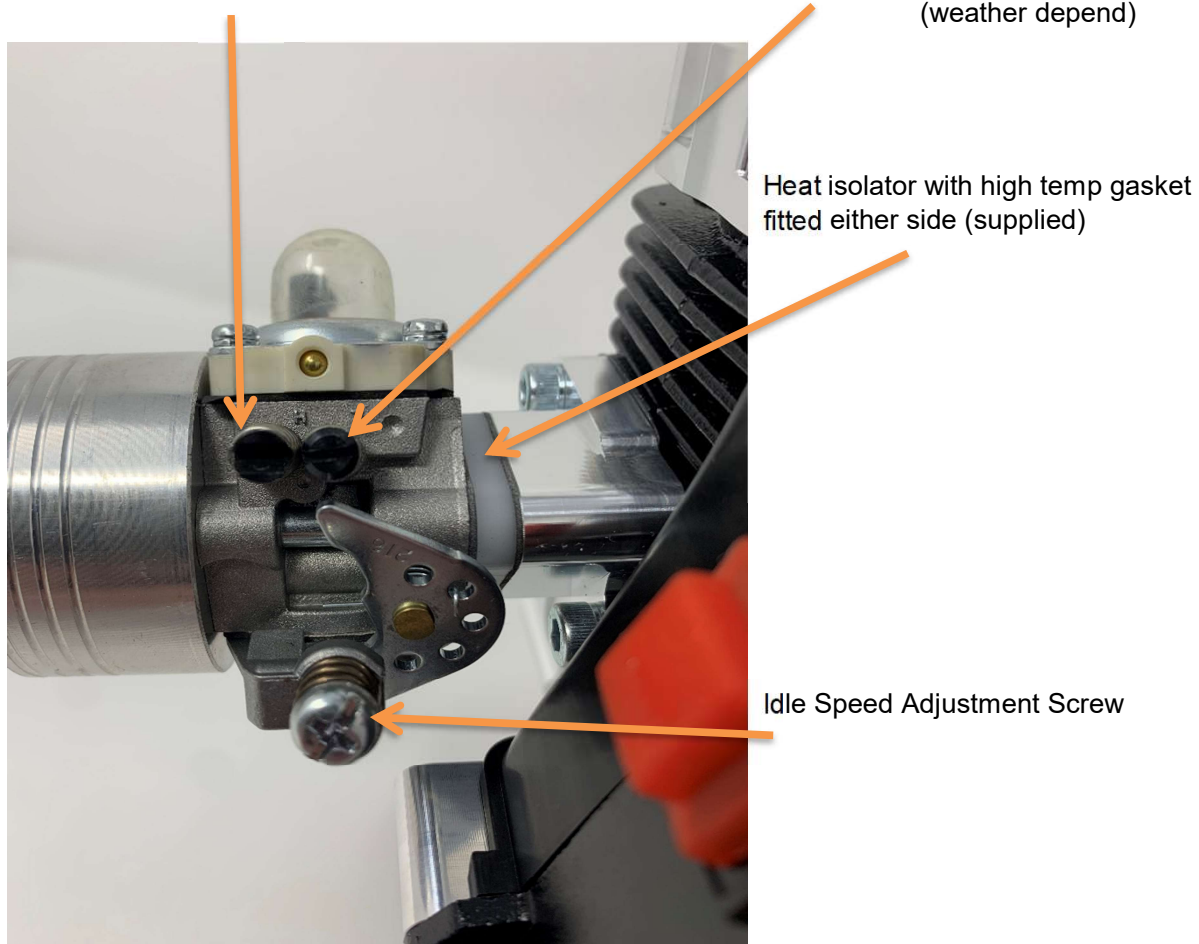

The base settings of the mixture screws may need some adjustment to suit your local atmospheric conditions e.g. temperature, humidity. If so adjustments should be made 1/16 of a turn at a time, with a test run after each adjustment.

CLUTCH FITMENT AND INFO

The TAYLOR 35 and the free billet housing/shim supplied will work with all clutch and carriers on the market, but if your looking for the ultimate setups be sure to run either Backbone or Vertigo clutch bells/gears plus a TAYLOR Billet carrier to suit your car (where available)

All 54mm clutches on the market will fit to your new engine, however with the extreme performance of the TAYLOR 35, we advise that you use a sintered steel clutch and high quality spring. For a savage launch I would consider a backbone 10k clutch and their 8500 spring offers a smoother action.

A CY clutch backplate is an ideal setup to keep the costs down but we also offer a 54mm cooling backplate for anyone who bashes really hard and wants to ensure low clutch temperatures

With powerful engines its important to ensure proper clutch ventilation, although the housing supplied is well designed for cooling, we recommend also using a vented carrier. If your running a steel clutch you don't need to worry about dirt or sand getting in anyway!

Clutch Removal

All normal clutch removal tools etc for zenoah engines will work perfectly on the TAYLOR 35

Tools are available on the market called "piston stoppers" which are screwed into the spark plug hole and stop engine rotation by physically stopping the piston from moving in the cylinder. **Only use this type of tool at your own risk because if used incorrectly can result in broken pistons crowns.**



Maintenance Info

To ensure that you get the maximum enjoyment from this product and a good service life, TAYLOR recommends that you take a little time to clean the engine and vehicle after use. It is easy to spot a little problem such as a loose bolt on an engine mount before it becomes a much bigger problem!

It is absolutely essential that only the best quality fully synthetic two-stroke oil is used. We recommend Putoline RS959 or Motul 800 oil but there are lots of great products on the market.

This must be mixed at a fuel/oil ratio of 25:1. Only good quality 91+ Octane must be used to prevent the possibility of detonation or seizure.

Taylor Coil Air Gap Working Range: 0.3-0.9mm


A minimum of a dual stage air filter is very important for protecting your engine, we use the RAM-AIR one. Proper oiling through the layers of foam is just as if not more important than the filter itself to protect in dusty conditions. Regular cleaning and re-oiling is required to keep air filtration at its best. The use of an water resistant Outerwears protective element is recommended for filtering out large debris.

Please ensure that your fuel equipment, and fuel system of the vehicle is kept in a clean condition. Dirt can play havoc with carburettors leading to much frustration and little fun. Please make sure your vehicle in-tank fuel filter is in good working order.

A full range of replacement service parts is available to keep your small block powerhouse in top condition. Just check the spares section with the TAYLOR 35 area of our website.

If you are unsure about carrying out a rebuild, we are more than happy to do it for you for a small charge plus parts.

Please contact your dealer for advice, or service, if you are in any doubt.

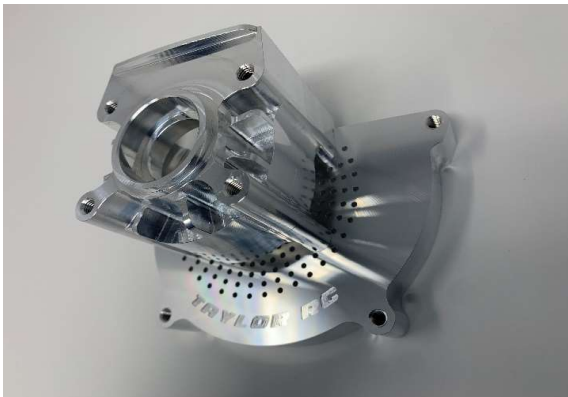

Limited Warranty

What this Warranty Covers

TAYLOR RC warrants that the product purchased will be free from defects in materials and workmanship at the date of purchase by the Purchaser.

What is Not Covered

This warranty is not transferable and does not cover (i) cosmetic damage, (ii) damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or due to improper use, installation, operation or maintenance, (iii) modification of or to any part of the product, (iv) attempted service by anyone other than TAYLOR or their appointed agent, or (v) products not purchased from TAYLOR or their appointed agent. (vi) the product if aftermarket components, which are not specifically approved by TAYLOR are used with the product, e.g. exhaust system.

OTHER THAN THE EXPRESS WARRANTY ABOVE, RCMAX MAKES NO OTHER WARRANTY OR REPRESENTATION, AND HEREBY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE PURCHASER ACKNOWLEDGES THAT THEY ALONE HAVE DETERMINED THAT THE PRODUCT WILL SUITABLY MEET THE REQUIREMENTS OF THE PURCHASER'S INTENDED USE

Purchasers Remedy

TAYLOR RC's sole obligation and purchasers sole and exclusive remedy shall be that TAYLOR will, at its option, either (i) service, or (ii) replace, any product determined by TAYLOR to be defective. TAYLOR Reserves the right to inspect any and all Product(s) involved in a warranty claim. Service or replacement decisions are at the sole discretion of TAYLOR. Proof of purchase is required for all warranty claims.

SERVICE OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE PURCHASERS SOLE AND EXCLUSIVE REMEDY.

Limitation of Liability

TAYLOR SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY, REGARDLESS OF WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, TORT, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER THEORY OF LIABILITY, EVEN IF TAYLOR HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Further in no event shall the liability of TAYLOR exceed the individual price of the Product on which the liability is asserted. As TAYLOR has no control over use, set-up, final assembly, modification or misuse, no liability shall be assumed nor accepted for any resulting damage or injury. By the act of use, set-up or assembly, the user accepts all resulting liability. If you as the purchaser or user are not prepared to accept the liability associated with the use of the Product, purchaser is advised to return the Product immediately in new and unused condition to the place of purchase.

Law

These terms are governed by the laws of England (without regard to conflict of law principals). This warranty gives you specific legal rights. TAYLOR reserves the right to change or modify this warranty at any time without notice.

